Background Light 70 x 70

For flash mode only
Luminous

288 LED's rot 617 nm

Backlight
Transmitted light illumination
Direct radiation with protective screen
or
Diffuse radiation with diffusing lens
Disc/diffuser optionally exchangeable

Illuminated field 70 x 70 mm
Aluminium housing black
Screw connections for 4 x M3
Bright and homogeneous

Cable black 300 mm permanently connected

Plug connector M12x1 4-pole
+ 24V DC Pin 1
free Pin 2
GND Pin 3
free Pin 4

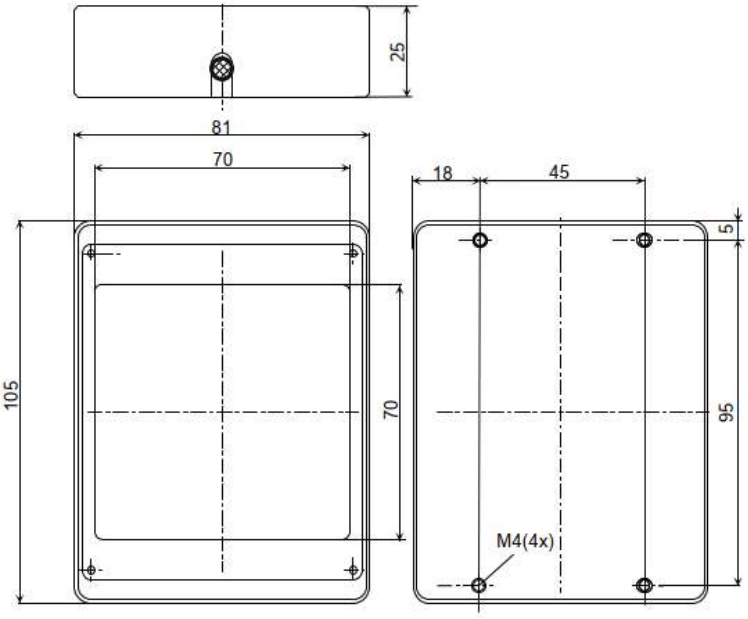

Flash module BA-5

Multifunctional flash or timer module for triggered control of two independently configurable chann-els for LED lighting.

Name	Flat light	Connection	Wavelength	Voltage	Current	Order Number
FLb70x70R	LED red, direct	4pol. cable 300 mm	617 nm	24 V DC	3.5 A	10115314
FLb70x70R-D	LED red, diffuse	4pol. cable 300 mm	617 nm	24 V DC	3.5 A	10115318
Flash module BA-5						10110015

JenCam GmbH
Felsbachstrasse 9
07745 Jena
Germany

Tel +49-(0)3641-2253-0
Fax +49-(0)3641-2253-19
www.jencam.de
info@jencam.de

JENCAM