# Background Light 50 x 50

For flash mode only
Luminous

168 LED's RD 617 nm

Transmitted light illumination
Direct radiation with protective screen
or
Diffuse radiation with diffusing lens
Illuminated field 50 x 50 mm
Aluminium housing black
Screw connections for 4 x M3
Bright and homogeneous

Cable black 300 mm permanently connected

Plug connector M12x1 4-pole
+ 24V DC Pin 1
free Pin 2
GND Pin 3
free Pin 4

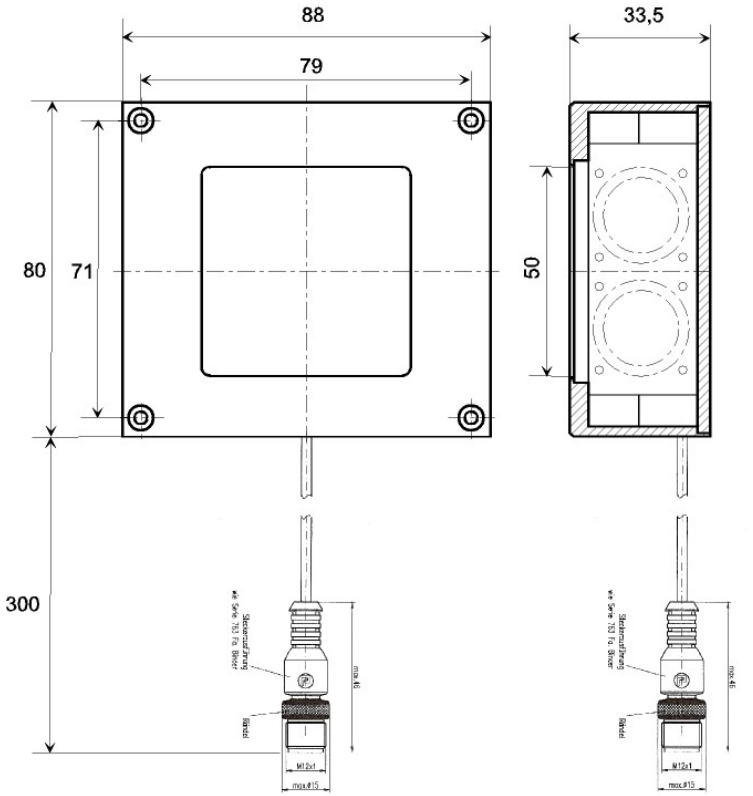





## Flash module BA-5

Multifunctional flash or timer module for triggered control of two independently configurable chann-els for LED lighting.

| Name | Flat light | Connection | Wavelength | Voltage | Current | Order Number |
|---|---|---|---|---|---|---|
| FLb50x50R | LED red, direct | 4pol. cable 300 mm | 617 nm | 24 V DC | 0.5 A | 10115329 |
| FLb50x50R-D | LED red, diffuse | 4pol. cable 300 mm | 617 nm | 24 V DC | 0.5 A | 10115330 |
| Flash module BA-5 | | | | | | 10110015 |

JenCam GmbH
Felsbachstrasse 9
07745 Jena
Germany

Tel +49-(0)3641-2253-0
Fax +49-(0)3641-2253-19
www.jencam.de
info@jencam.de

JENCAM