LED Coaxial Light 35 x 35

36 LED's RD 617 nm
36 LED's IR 875 nm
36 LED's WL 5600 K
36 LED's BL 469 nm

Coaxial illumination
Illuminated field 35 x 35 mm
Glass cover on both sides
Semi-transparent mirror for coupling the light
Parallel, diffuse light
Aluminium housing black
Screw connection 4 x M4
Without fan, long life
36 LED's
24 V Operating voltage
2.4 W Power consumption

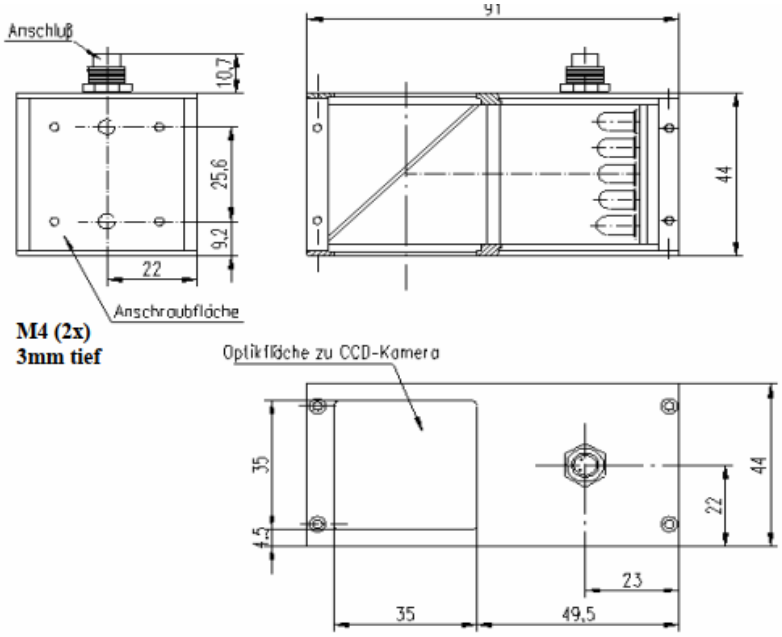

Pin assignment 2 pole
View on pin contacts



Name	Coax light	Connection	Wavelength	Voltage	Current	Order Number
K35x35R	LED red, direct	2pol. plug	630 nm	24 V DC	0.1 A	10116014
K35x35IR	LED ir, direct	2pol. plug	875 nm	24 V DC	0.1 A	10116020
K35x35W	LED white, direct	2pol. plug	5600 K	24 V DC	0.1 A	10116030
K35x35BL	LED white, direct	2pol. plug	469nm	24 V DC	0.1 A	10116047
SV cable for LQ with plug, 2pole, 2 m						10115026
SV cable for LQ with plug, 2pole, 5 m						10115017

JenCam GmbH
Felsbachstrasse 9
07745 Jena
Germany

Tel +49-(0)3641-2253-0
Fax +49-(0)3641-2253-19
www.jencam.de
info@jencam.de