TAMRON
New eyes for industry

High Quality Machine Vision Lens

22HA

- High Resolution Lens
- Higher Close Up Capability
- ultra low distorsion
- Compact Design

P/N		22HA
Imager size		2/3”
Mount		C-Mount
Focal length		6.5mm
Aperture		F/ 1.8
Angle of View (horizontal x vertical)	2/3”	71.6° x 55.5°
	1/2”	53.9° x 41.0°
	1/3”	41.0° x 31.0°
Focusing range		1.5m - ∞
Operation	Focus	-
	Iris	Manual w/lock
Filter size		M35.5mm P=0.5mm
Back focus (in air)		13.00mm
Exit Pupil Position		-31.8mm
Optical Construction		6 groups / 7 elements
Distortion		-2.16% (distance 0.5m)
Optical Overall Length		35.40mm
Maximum Diameter		37mm
Weight		60g
Operating Temperature		-5 ~ 50°C

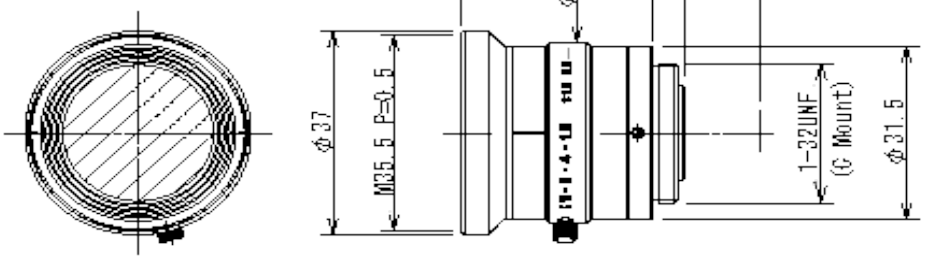

TAMRON Europe GmbH - Robert-Bosch-Str. 9 - 50679 Köln - Phone +49 (0) 221 / 970325-0
Fax +49 (0) 221 / 970325-4 - Email info@tamron.de

22HA

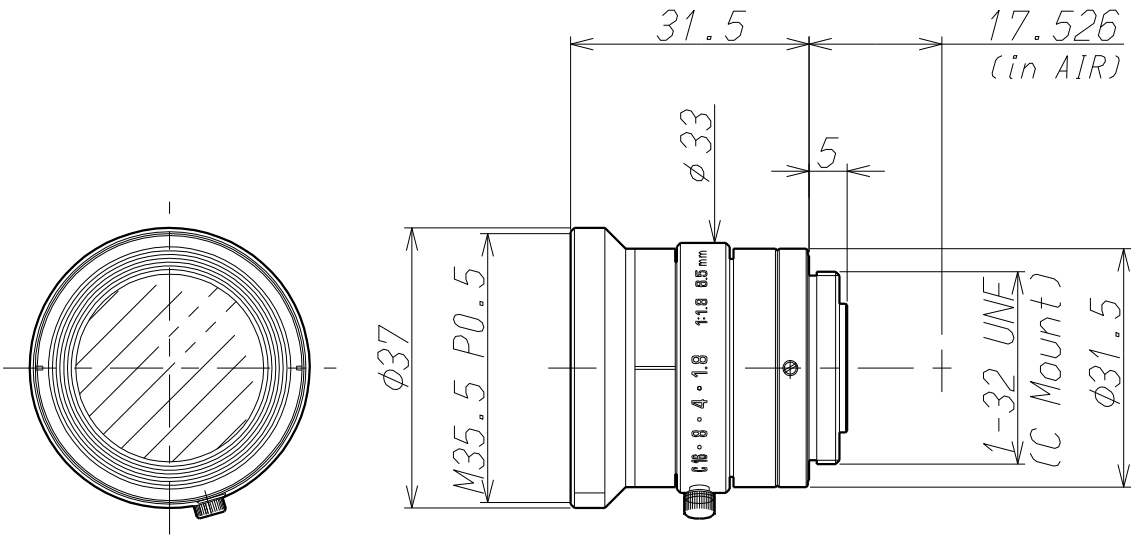

Imager Size	CCDサイズ		2/3
Mount Type	マウント		C
Focal Length	焦点距離		6.5mm
Aperture Range	絞り範囲		1.8~Close
Angle of View(Horizontal×Vertical) 画角(水平×垂直)		2/3	71.6° ×55.5°
		1/2	53.9° ×41.0°
		1/3	41.0° ×31.0°
Focusing Range	フォーカス範囲		1.5m ～ ∞
Operation 操作方法	Focus	フォーカス	――――――
	Iris	アイリス	Manual w/lock 手動ロック付
Filter Size	フィルターネジ径		M35.5 P=0.5mm
Back Focus(in air)	バックフォーカス(in air)		13.00mm
Weight	重量		60g
Operating Temperature	動作温度範囲		-5℃~+50℃