LED Mini Ring Light RL 36/21

For Lenses with filter thread
M30.5 – M27.0 – M25.5

617nm 12 LED RD
617nm 24 LED RD
875nm 24 LED IR
469nm 24 LED BL
5600K 24 LED WL

Ring light illumination
Directed or diffuse light
Light field outside Ø36 mm, inside Ø 21 mm
Aluminium housing black
Screw connection M30.5 x 0.5
or M27.0 x 0.5
or M25.5 x 0.5
Without fan, long service life

12 V (8...24V) Operating voltage
2.4 W RD Power consumption
4.8 W RD Power consumption
6.0 W IR Power consumption
6.0 W BL Power consumption
6.0 W WL Power consumption

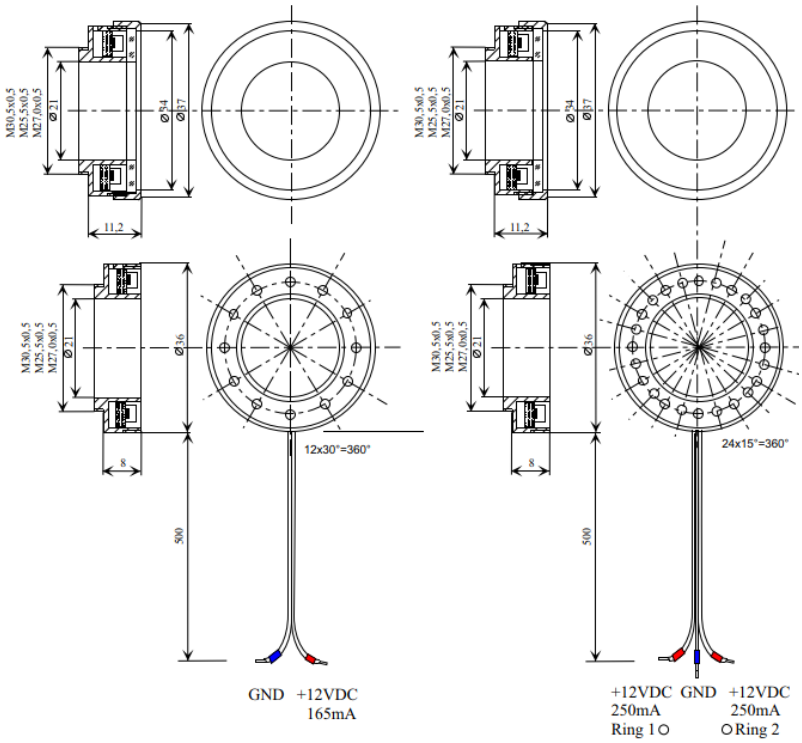

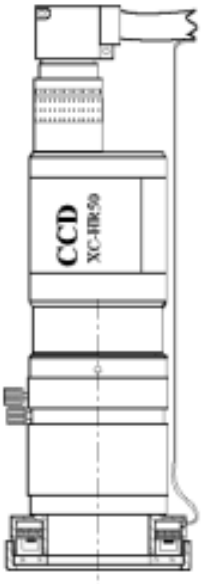

JenCam GmbH
Felsbachstrasse 9
07745 Jena
Germany

Tel +49-(0)3641-2253-0
Fax +49-(0)3641-2253-19
www.jencam.de
info@jencam.de

JENCAM

	Name	Ring light	Connection	Wavelength	Voltage	Current	Order Number
RT	RL-36M30 RT	LED red	2pol. strand	617 nm	12 V DC	0.2 A	10115147
	RL-36M30 RT Diffus	LED red, diffuse	2pol. strand	617 nm	12 V DC	0.2 A	10115144
	RL-36M27 RT	LED red	2pol. strand	617 nm	12 V DC	0.2 A	10115023
	RL-36M27 RT Diffus	LED red, diffuse	2pol. strand	617 nm	12 V DC	0.2 A	10115022
	RL-36M25 RT	LED red	2pol. strand	617 nm	12 V DC	0.2 A	10115053
	RL-36M25 RT Diffus	LED red, diffuse	2pol. strand	617 nm	12 V DC	0.2 A	10115054
	RL-36M30/2 RT	LED red	3pol. strand	617 nm	12 V DC	0.4 A	10115261
	RL-36M30/2 RT Diffus	LED red, diffuse	3pol. strand	617 nm	12 V DC	0.4 A	10115264
	RL-36M27/2 RT	LED red	3pol. strand	617 nm	12 V DC	0.4 A	10115249
	RL-36M27/2 RT Diffus	LED red, diffuse	3pol. strand	617 nm	12 V DC	0.4 A	10115263
	RL-36M25/2 RT	LED red	3pol. strand	617 nm	12 V DC	0.4 A	10115260
	RL-36M25/2 RT Diffus	LED red, diffuse	3pol. strand	617 nm	12 V DC	0.4 A	10115262
IR	RL-36M30 IR	LED ir	3pol. strand	875 nm	12 V DC	0.5 A	10115148
	RL-36M30 IR Diffus	LED ir, diffuse	3pol. strand	875 nm	12 V DC	0.5 A	10115145
	RL-36M27 IR	LED ir	3pol. strand	875 nm	12 V DC	0.5 A	10115134
	RL-36M27 IR Diffus	LED ir, diffuse	3pol. strand	875 nm	12 V DC	0.5 A	10115133
	RL-36M25 IR	LED ir	3pol. strand	875 nm	12 V DC	0.5 A	10115135
	RL-36M25 IR Diffus	LED ir, diffuse	3pol. strand	875 nm	12 V DC	0.5 A	10115132
W	RL-36M30 WS	LED white	3pol. strand	5600 K	12 V DC	0.5 A	10115149
	RL-36M30 WS Diffus	LED white, diffuse	3pol. strand	5600 K	12 V DC	0.5 A	10115146
	RL-36M30 WS	LED white	3pol. strand	5600 K	12 V DC	0.5 A	10115049
	RL-36M27 WS Diffus	LED white, diffuse	3pol. strand	5600 K	12 V DC	0.5 A	10115038
	RL-36M25 WS	LED white	3pol. strand	5600 K	12 V DC	0.5 A	10115055
	RL-36M25 WS Diffus	LED white, diffuse	3pol. strand	5600 K	12 V DC	0.5 A	10115056
BL	RL-36M30 BL	LED blue	3pol. strand	469 nm	12 V DC	0.5 A	10115231
	RL-36M30 BL Diffus	LED blue, diffuse	3pol. strand	469 nm	12 V DC	0.5 A	10115233
	RL-36M27 BL	LED blue	3pol. strand	469 nm	12 V DC	0.5 A	10115229
	RL-36M27 BL Diffus	LED blue, diffuse	3pol. strand	469 nm	12 V DC	0.5 A	10115226
	RL-36M25 BL	LED blue	3pol. strand	469 nm	12 V DC	0.5 A	10115230
	RL-36M25 BL Diffus	LED blue, diffuse	3pol. strand	469 nm	12 V DC	0.5 A	10115232

JenCam GmbH
Felsbachstrasse 9
07745 Jena
Germany

Tel +49-(0)3641-2253-0
Fax +49-(0)3641-2253-19
www.jencam.de
info@jencam.de

JENCAM